

Epson's projector series combines dynamic image quality with exceptional versatility to deliver stunning and vivid presentations. Boasting a high colour brightness, this versatile projector series promises vibrant and realistic colour projections. With advanced features such as optional Wi-Fi connectivity, Colour Universal Design, a high contrast ratio and a sliding horizontal keystone adjuster, you'll be able to deliver vivid, sharp presentations anytime, anywhere.



EB-W03/X03

- 
Wi-Fi*
- 
iProjection
- 
HDMI
- 
Horizontal
Keystone
Adjuster
- 
Power
Savings

ENGINEERED FOR BUSINESS

Unparalleled Performance

Enjoy unparalleled performance with optional Wi-Fi connectivity, high contrast ratio, HDMI connection and the horizontal keystone adjuster.

Made for Everyone

Designed with a Colour Universal Design for those with various types of colour vision, and equipped with eco-friendly features.

Stunning Colour Brightness

Achieve dazzling, sharp and colourful images with the high Colour Light Output.



*Optional

Epson's multimedia projector series is engineered to make everyday presentations easy. Versatile, user-friendly and equipped with advanced features including HDMI connection and automatic keystone adjustment, these projectors will enable you to deliver smooth and high contrast presentations every time.



Unparalleled Performance

Wireless Transmission


Enjoy enhanced connectivity and flexibility with Wi-Fi connectivity*. Do away with the hassles of messy cabling. Welcome to a wireless work place. Connect directly from your laptop or through your network.

* Wireless LAN adaptor ELPAP07 is required



Epson iProjection

With the iProjection application for both iOS and Android, wireless projection from a smart device is made possible. This feature supports various files and allows you to present your smartphone contents with ease. It also lets you use other touch-screen operations, such as flicking to turn pages and pinching to zoom in or out.



* In iProjection, projector profile search, multi-screen display, distribution function, audio transfer, movie file transfer, interrupt connection disabling and encryption data transfer capabilities are not supported.



High Contrast Ratio

Add brilliance to your presentation with a high contrast ratio. Boasting a contrast ratio of 10000:1, these projectors enable your audience to view your presentation with added clarity even down the finest details.



Horizontal Keystone Adjuster

Deliver powerful presentations anywhere in the room. With the easy-to-use sliding Horizontal Keystone Adjuster, screen corrections can be done quickly, easily and accurately, even in a limited space.

With automatic vertical keystone detection and adjustment, there is no longer any need for awkward and time-consuming manual image adjustments that interrupt the smooth flow of your presentation delivery. This handy feature automatically detects the projector's vertical keystone distortion and corrects it instantly.



HDMI Connectivity

With the built-in HDMI terminal, the transmission of digital images and sounds is a breeze. Transfer and enjoy high-quality images and sounds with just one cable. With digital connection, even images projected from a SVGA model will appear crisp and clear.



A/V Mute Lens Shutter

Fully manage what is being projected simply by sliding the A/V Mute Lens Shutter. Doing so will project a black screen internally, switching off all audio and visual instantly, akin to putting the projector into "sleep" mode.

Alternatively, use the A/V Mute Timer to avoid unnecessary projection. When this is turned 'ON', the projector will automatically power off if the A/V shutter is closed for 30 minutes, saving lamp life and reducing power consumption.



Direct Display from USB

View a JPEG, BMP, PNG or GIF slideshow without a PC by simply inserting a USB memory device into the USB port on the projector.



Convenient Connection to a Document Camera

This projector series conveniently connects directly to Epson's Portable Document Camera ELPDC06 via a USB cable without a computer, revolutionising the way you present.



Simply place the presentation material under the camera and enlarge the projection according to the desired size – perfect for classroom and office discussions.

IR Receivers


With IR Receivers at both the front and rear of the projector, using the remote control has never been easier. Now, you'll be able to use the remote control wherever the projector is placed for a seamless presentation.



IR Receivers

Redirected Exhaust

The front-facing exhaust is conveniently positioned to prevent anyone from being exposed to the hot exhaust, especially when on a narrow table. This allows the audience to fully concentrate on the presentation, even if they are seated beside or behind the projector.

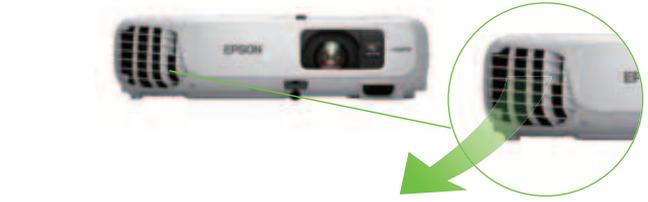

Other projectors with side exhaust

Made for Everyone

Eco-friendly

Reduce power consumption and do your part for the environment with these eco-friendly features. Fully manage your projector and save power using the "ECO mode" and lamp dimming function, which allows you to adjust the brightness and power consumption of the projector.

When the Sleep Mode is set to "On", the projector enters a very low brightness setting if no signal is detected for five minutes, saving lamp life up to 70%.



Lamp dimming function

Colour Universal Design

Developed in consideration for people with various types of colour vision, the Colour Universal Design (CUD) uses colour schemes that can be easily identified and distinguished so important information is always accurately conveyed. With this user-oriented design system, functions on the projector's remote control, control panel and LED lights can be easily seen, enabling everyone to operate the projector with ease.

Common-type colour vision



Users with common-type colour vision will see the orange button while users with colour perception deficiency will see brown.

Colour perception deficiency (deuteranopia)



Both of the users with common-type colour vision and colour perception deficiency will see the blue button.



SEE VIBRANT, REALISTIC COLOURS WITH HIGH COLOUR BRIGHTNESS.

A New Specification

Projectors have always had their brightness rated only for white light. However, they may have very different colour brightness levels. The Colour Brightness specification provides a new way for buyers to compare the holistic performance (white and colour light brightness) of projectors to make a more informed decision.



Epson
Colour Brightness 2600 Lumens
White Brightness 2600 Lumens

Competitor
Colour Brightness 750 Lumens
White Brightness 2700 Lumens

Why Does Colour Brightness Matter?

Even if a projector has high white brightness, its Colour Brightness could be as low as 1/3 of its white light brightness specification. With a projector that has high Colour Brightness, you'll see vibrant, realistic colours; but if Colour Brightness is low, colours can look dull and dark, skin tones can be reproduced poorly and important details can be lost.



Epson

Competitor

What is Colour Brightness?

As the term implies, Colour Brightness is a new international standard that states a projector's colour light output in lumens. It measures the brightness of a projector's red, green and blue light.

These are the measurements to look for:

Colour Brightness - Colour Light Output

White Brightness - White Light Output




Epson

Competitor

How to Find a Projector's Colour Brightness?

1. Look for separate Colour Brightness and white brightness specification.
2. Visit www.colourlightoutput.com
3. For some manufacturers, the projector's Colour Brightness is only 1/3 the White Brightness.

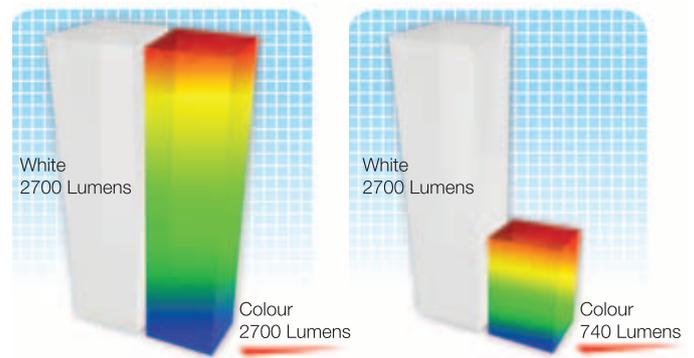

Epson

Other 1-Chip Projectors



www.epson.com.sg/colourbrightness


EPSON 3LCD TECHNOLOGY – FOR BRIGHT, FAITHFUL COLOURS

3LCD projectors offer brighter and more accurate colours as they produce different shades and hues by filtering, then mixing beams of the three primary colours (red, green and blue).

In a 3LCD projector, white light is first split into the three beams of primary colours. Each beam is then filtered through its own LCD that will give each individual pixel of the image its exact brightness for each colour. The colour beams are then perfectly recombined in a prism before being projected out as a complete image.

This compares to projectors using single-chip technology that actually project individual colours sequentially by filtering their single white light beam through a colour wheel, and then relying on human colour perception to combine the colours in the viewers' minds.

As a result, 3LCD projectors also offer greater detail, smoother gradations, no "colour breakup" effect, are easier on viewers' eyes, and consume about 25% less power to achieve the same brightness compared to a single-chip projector using a lamp of the same wattage.

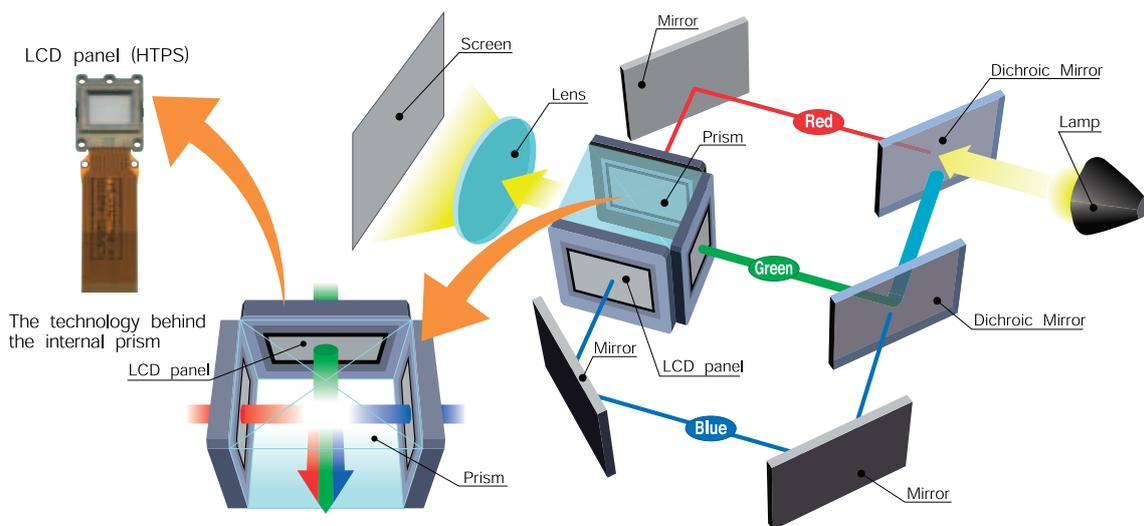

3LCD projector : RGB are projected at the same time, which makes the single composite image easy on the eyes.

- An independent test by projector review media ProjectorCentral.com in 2009 of about 800 projectors found that on average, 3LCD projectors use 25% less power than single-chip projectors.



www.3lcd.com



Eco Features

- Uses just 0.28W of power in standby mode
- Projector optics employ lead-free lenses
- Unpainted plastic housing reduces the environment impact
- The flame retardants used in the plastic housing do not contain chlorine or bromine

Better Products for a Better Future™

For more information on Epson's environmental programmes, visit <http://global.epson.com/SR/environment>.

PARTNERS IN PERFECTION

Wireless LAN Adaptor ELPAP07



Supports 802.11 b/g/n connection
Compatible with all Epson wireless-enabled projectors

Desktop Document Camera ELPDC20



3kg / 6.6lbs
2 megapixels with 30fps
12 x optical zoom
1080p output resolution
HDMI digital connectivity

Ultra-portable Document Camera ELPDC06



Easily portable; 0.96kg / 2.11lbs
1.92 megapixels with 15fps
4 x digital zoom
USB powered

MODEL NUMBER	EB-X03	
Projection Technology	RGB liquid crystal shutter projection system (3LCD)	
Specifications of Main Parts		
LCD	Size	0.55"
	Native Resolution	XGA (1024 x 768)
Projection Lens	Type	Optical Zoom (Manual) / Focus (Manual)
	F-Number	1.58 - 1.72
	Focal Length	16.9 - 20.28 mm
	Aspect Ratio	4:3 Native, 16:9 supported
	Zoom Ratio	1 - 1.2
	Throw Ratio	1.48 - 1.77 (Wide - Tele)
Lamp	Type	200W UHE
	Life (Normal / Eco) ¹	5,000 hours / 6,000 hours
Screen Size (Projected Distance)		
Zoom: Wide	30° - 300° [0.9 - 9.0 m]	
Zoom: Tele	30° - 300° [1.08 - 10.8 m]	
Standard Size	60" screen 1.8 - 2.17 m	
Brightness²		
Colour Light Output	2,700lm	
White Light Output (Normal / Eco)	2,700lm / 1,890lm	
Colour Reproduction	Up to 1.07 billion colours	
Colour Processing	10 bit	
Contrast Ratio		
10,000:1		
Internal Speaker(s)		
Sound Output	1W Monaural	
Keystone Correction		
Vertical / Horizontal	±30° / ±30°	
Auto Keystone Correction	Yes (Vertical only)	
Connectivity		
Analog Input	D-Sub 15pin	1 (Blue)
	Component	D-Sub 15pin x 1 (Blue) (common with Analog RGB connector)
	Composite	RCA x 1 (Yellow)
	S-Video	Mini DIN x 1
Digital Input	HDMI	1 (HDCP supported)
Audio Input	RCA (White/Red)	1 Pair
Others	USB Type A	1 (USB Memory / ELPDC06 Document Camera / Wireless LAN adaptor)
	USB Type B	1 (3-in-1 USB Display, Mouse, K/B, Control)
Network	Wireless	Optional (ELPAP07)
Wireless Specifications		
Supported Speed For Each Mode ³	IEEE 802.11b: 11 Mbps, IEEE 802.11g: 54 Mbps, IEEE 802.11n: 130 Mbps	
Wireless Lan Security	WPA/WPA2-Personal (with optional Wireless LAN Unit)	
Operating Temperature		
	5 - 35 °C <41 - 95 °F> (0m / 0ft - 2,286m / 7,500ft)	
	5 - 30 °C <41 - 86 °F> (over 2,286m / 7,500ft)	
	(20% - 80% humidity, unfrozen)	
Operating Altitude		
	0 - 3,000 m <0 - 9,843 ft> (over 1,500m / 4,921ft: with high altitude mode)	
Direct Power On / Off		
	Yes	
Start-Up Period		
	About 5 seconds, Warm-up Period: 30 seconds	
Cool Down Period		
	Instant Off	
Air Filter	Type	Normal
	Maintenance Cycle	3,000 hours ⁴
Power Supply Voltage		
	100 - 240 V AC ±10%, 50/60 Hz	
Power Consumption (220 - 240V)		
Lamp On (Normal / Eco)	270W / 201W	
Standby (Network On / Off)	3W / 0.28W	
Dimension Excluding Feet (D X W X H)		
	234 x 297 x 77 mm	
Weight		
	2.4kg	
Fan Noise (Normal / Eco)		
	37dB / 29dB	
Warranty		
	2 years	

Supplied Accessories

Power Cable: 1.8m
Computer Cable (VGA Cable): 1.8m
USB Cable (Type A/B): 1.8m
Remote Control: Yes, with Alkaline AA Battery x 2
Soft Carrying Case

Optional Accessories

Spare Lamp: ELPLP78
Air Filter: ELPAF32
Wireless LAN Adaptor: ELPAP07
Quick Wireless Connection USB Key: ELPAP09
Ceiling Mount: ELPMB23

EB-X03



© 2014 Epson India Pvt. Ltd. All Rights Reserved. Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited.

EPSON and EXCEED YOUR VISION are registered trademarks of Seiko Epson Corporation.

All other product names and other company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners.

Epson disclaims any and all rights in those marks. Projected images shown herein are simulations. The actual product design and contents may vary. Specifications are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Apple, iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.

Android is a trademark of Google Inc.

Information correct as at November 2014

¹ Lamp life will vary depending upon mode selected, environmental conditions and usage. Lamp brightness decreases over time.

² Colour brightness (colour light output) and white brightness (white light output) will vary depending on usage conditions. Colour light output measured in accordance with IDMS 15:4; white light output measured in accordance with ISO 21118.

³ Maximum speed and range is achievable when used with same enhanced mode technology. Actual data rates, features and performance may vary depending on your computer system, the environment and other factors.

⁴ When used in the general office environment (the amount of floating dust: 0.04 - 0.2 mg/m³). Based on the Epson's in-house test results. 25°C (77°F).

EPSON INDIA PVT. LTD.

12th Floor, The Millenia, Tower A, No.1,
Murphy Road, Ulsoor, Bangalore - 560 008.
Tel: 080-30515000 Fax: 080-30515005

Regional Offices:

Ahmedabad - 26407176/77, Chennai - 30277500/11, Cochin - 4012315,
Coimbatore - 98942 19200, Indore - 4701830, Kolkata - 65009370/77, Mumbai - 3079 8200,
New Delhi - 33120300/01, Pune - 30286000, Secunderabad - 64639640/41



Epson Helpline:

For product info or service - 1800 425 0011
For service - 1860 3000 1600 (9AM - 6PM) (Mon - Sat)

www.epson.co.in



Official Partner
of Manchester United

MODEL NUMBER	EB-W03	
Projection Technology	RGB liquid crystal shutter projection system (3LCD)	
Specifications of Main Parts		
LCD	Size	0.59" with MLA (D8)
	Native Resolution	WXGA (1280 x 800)
Projection Lens	Type	Optical Zoom (Manual) / Focus (Manual)
	F-Number	1.58 - 1.72
	Focal Length	16.9 - 20.28 mm
	Aspect Ratio	4:3 Native, 16:9 supported
	Zoom Ratio	1 - 1.2
Lamp	Throw Ratio	1.30 - 1.56 (Wide - Tele)
	Type	200W UHE
	Life (Normal / Eco) ¹	5,000 hours / 6,000 hours
Screen Size (Projected Distance)		
Zoom: Wide	33" - 318" [0.9 - 9.0 m]	
Zoom: Tele	33" - 317" [1.08 - 10.8 m]	
Standard Size	60" screen 1.68 - 2.02 m	
Brightness²		
Colour Light Output	2,700lm	
White Light Output (Normal / Eco)	2,700lm / 1,890lm	
Colour Reproduction	Up to 1.07 billion colours	
Colour Processing	10 bit	
Contrast Ratio		
10,000:1		
Internal Speaker(s)		
Sound Output	1W Monaural	
Keystone Correction		
Vertical / Horizontal	±30° / ±30°	
Auto Keystone Correction	Yes (Vertical only)	
Connectivity		
Analog Input	D-Sub 15pin	1 (Blue)
	Component	D-Sub 15pin x 1 (Blue) (common with Analog RGB connector)
	Composite	RCA x 1 (Yellow)
	S-Video	Mini DIN x 1
Digital Input	HDMI	1 (HDCP supported)
Audio Input	RCA (White/Red)	1 Pair
Others	USB Type A	1 (USB Memory / ELPDC06 Document Camera / Wireless LAN adaptor)
	USB Type B	1 (3-in-1 USB Display, Mouse, K/B, Control)
Network	Wireless	Optional (ELPAP07)
Wireless Specifications		
Supported Speed For Each Mode ³	IEEE 802.11b: 11 Mbps, IEEE 802.11g: 54 Mbps, IEEE 802.11n: 130 Mbps	
Wireless Lan Security	WPA/WPA2-Personal (with optional Wireless LAN Unit)	
Operating Temperature		
	5 - 35 °C <41 - 95 °F> (0m / 0ft - 2,286m / 7,500ft) 5 - 30 °C <41 - 86 °F> (over 2,286m / 7,500ft) (20% - 80% humidity, unfrozen)	
Operating Altitude		
	0 - 3,000 m <0 - 9,843 ft> (over 1,500m / 4,921ft: with high altitude mode)	
Direct Power On / Off		
	Yes	
Start-Up Period		
	About 5 seconds, Warm-up Period: 30 seconds	
Cool Down Period		
	Instant Off	
Air Filter	Type	Normal
	Maintenance Cycle	3,000 hours ⁴
Power Supply Voltage		
	100 - 240 V AC ±10%, 50/60 Hz	
Power Consumption (220 - 240V)		
Lamp On (Normal / Eco)	270W / 201W	
Standby (Network On / Off)	3W / 0.28W	
Dimension Excluding Feet (D X W X H)		
	234 x 297 x 77 mm	
Weight		
	2.4kg	
Fan Noise (Normal / Eco)		
	37dB / 29dB	
Warranty		
	2 years	

Supplied Accessories

Power Cable: 1.8m
Computer Cable (VGA Cable): 1.8m
USB Cable (Type A/B): 1.8m
Remote Control: Yes, with Alkaline AA Battery x 2
Soft Carrying Case

Optional Accessories

Spare Lamp: ELPLP78
Air Filter: ELPAF32
Wireless LAN Adaptor: ELPAP07
Quick Wireless Connection USB Key: ELPAP09
Ceiling Mount: ELPMB23

EB-W03



© 2014 Epson India Pvt. Ltd. All Rights Reserved. Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited.

EPSON and EXCEED YOUR VISION are registered trademarks of Seiko Epson Corporation.

All other product names and other company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners.

Epson disclaims any and all rights in those marks. Projected images shown herein are simulations. The actual product design and contents may vary. Specifications are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Apple, iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.

Android is a trademark of Google Inc.

Information correct as at November 2014

¹ Lamp life will vary depending upon mode selected, environmental conditions and usage. Lamp brightness decreases over time.

² Colour brightness (colour light output) and white brightness (white light output) will vary depending on usage conditions. Colour light output measured in accordance with IDMS 15:4; white light output measured in accordance with ISO 21118.

³ Maximum speed and range is achievable when used with same enhanced mode technology. Actual data rates, features and performance may vary depending on your computer system, the environment and other factors.

⁴ When used in the general office environment (the amount of floating dust: 0.04 - 0.2 mg/m³). Based on the Epson's in-house test results. 25°C (77°F).

EPSON INDIA PVT. LTD.

12th Floor, The Millenia, Tower A, No.1,
Murphy Road, Ulsoor, Bangalore - 560 008.
Tel: 080-30515000 Fax: 080-30515005

Regional Offices:

Ahmedabad - 26407176/77, Chennai - 30277500/11, Cochin - 4012315,
Coimbatore - 98942 19200, Indore - 4701830, Kolkata - 65009370/77, Mumbai - 3079 8200,
New Delhi - 33120300/01, Pune - 30286000, Secunderabad - 64639640/41



Epson Helpline:
For product info or service - 1800 425 0011
For service - 1860 3000 1600 (9AM - 6PM) (Mon - Sat)

www.epson.co.in

